



Type	Items	Indicators	
Name	Product name	Single Phase APF (A)	
Specification	Voltage classes	220V	
	Module specification	15A	30A
	Module size w*h*d(mm)	238*87*240	
	Parallel number	12	
Input	Operating Voltage	220V (-30%~+20%)	
	Working frequency	50Hz (-10% ~ +10%)	
	Current Transformer	100:5 ~ 10000:5	
Functions	Compensation harmonic	2-17 Odd times	
	Compensation for reactive power	-1~+1 adjustable	
Communication protocol	Communication method	RS485,Modbus protocol	
	Communication Interface	RS485	
Technical index	Full response time	<10ms	
	Active loss	<2.5%	
	Heat dissipation method	Intelligent air cooling	
	Noise	<60dB	
	Protective function	Over 20 kinds of protections such as over-voltage, under-voltage, overheating, over-current, short circuit, etc.	
	CT installation position	Load side	
Environmental requirement	Operating temperature	-10℃ ~+50℃	
	Altitude	<5000 meters (more than 1500 meters, 1% reduction for each additional 100 meters)	
	Relative humidity	<95%, no condensation	
	Protection level	Module IP20, electronic layer IP42 (IP54 can be customized)	
	Anti-pollution level	Level 2 (Customizable level 3)	


Dimension

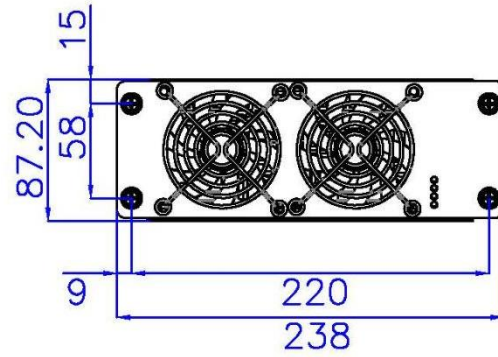


Front

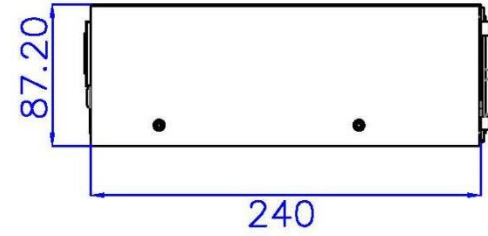

Side

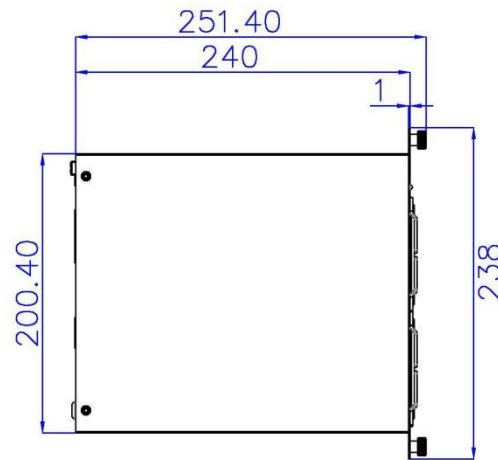

Down

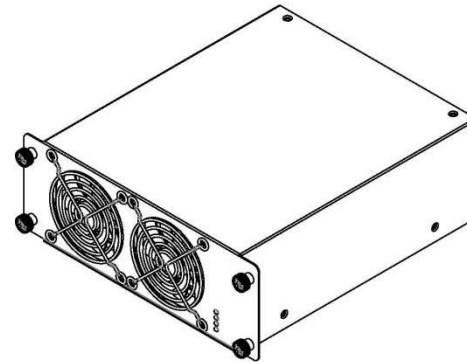

3D